

DATASHEET



Rapiscan[®] Systems Metor[®] 28e is a unique hand-held metal detector with enhanced capabilities, detecting objects made of all metal, both ferrous and non-ferrous.

Hand-held metal detectors are an integral part of the physical security screening process. With the Metor[®] 28e, we have designed a unit that benefits security personnel as well as the person being scanned. Our unique angled design allows you to thoroughly scan an individual, while keeping your hand away from their body.

UNIFORM DETECTION OF ALL METALS

LONG BATTERY LIFE, FAST CHARGING

MICROCONTROLLER TECHNOLOGY

MICROCONTROLLER TECHNOLOGY

Fully digital design guarantees consistent calibration-free operation and provides versatile programmable functionalities.

SENSITIVITY

Programmable sensitivity levels:

- Level 1: Small handguns and knives
- Level 2: Razor blades, handcuff keys
- Level 3: 22 cal. bullet, metal shanks

ALARM INDICATION MODES

Audible-visual and Vibration/Silent-visual with adjustable alarm tone, vibration strength. The alarm tone proportional to the size of the detected object.

FAST CHARGING

Fast charging capability allows recharging batteries fully between work shifts.

SECURE AND ADJUSTMENTS

All settings can be locked to prevent unauthorized parameter changes by operators.

UNIQUE DESIGN, RUGGED AND LIGHTWEIGHT

Highly impact resistant ABS case provides excellent durability and light weight. The circular opening assists in pointing metal objects. Comfortable handle and wrist strap for easy control and grip.

LONG BATTERY LIFE

Very long operating time with two AA-batteries, (rechargeable NiMH, disposable alkaline or lithium battery). Low battery and empty battery warnings.

UNIFORM DETECTION

Metor[®] 28e detects objects made of all metals, both ferrous and non-ferrous.

YOUR AUTHORISED DISTRIBUTOR

X SELMATEC

NORWAY

+47 63 92 84 00
sales@selmatec.no
www.selmatec.no

DENMARK


+45 48 18 90 33
sales@selmatec.dk
www.selmatec.no

SWEDEN

+46 19-670 81 00
sales@selmatec.se
www.selmatec.se

FINLAND

+358 50 4093175
sales@selmatec.fi
www.selmatec.fi

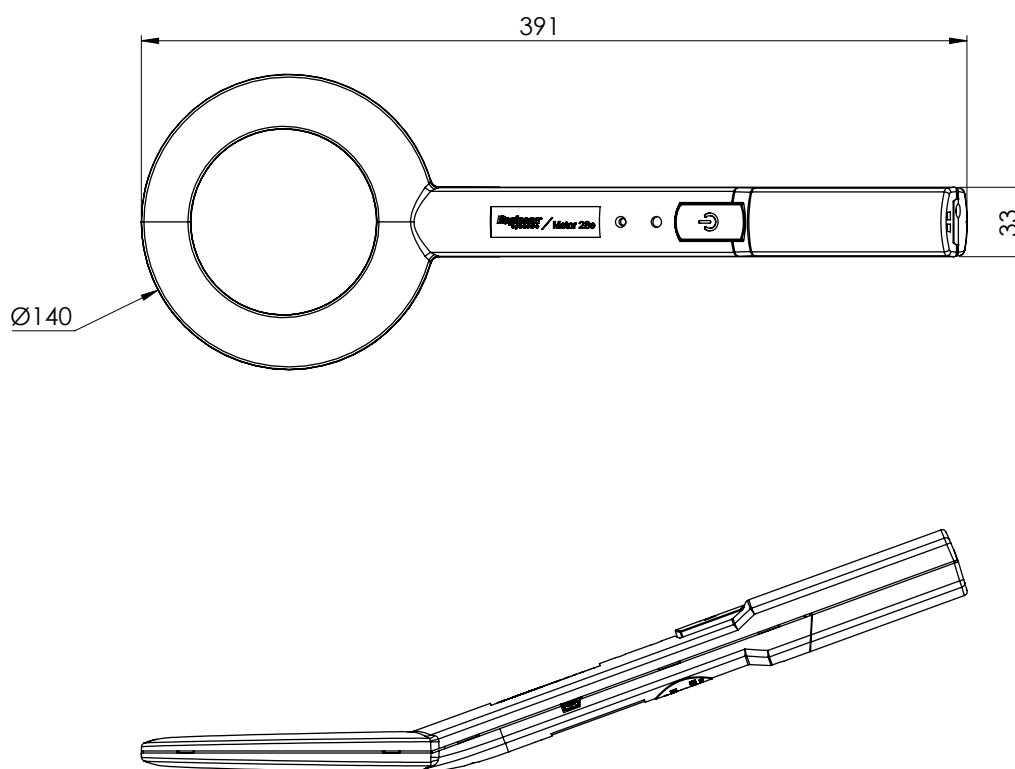

PHYSICAL SPECIFICATION

DIMENSIONS (BODY)	L	410 mm (16.35 in)
	W	140 mm (5.5 in)
DIMENSIONS (GRIP)	H	33 mm (1.3 in)
	W	33 mm (1.3 in)
WEIGHT (BATTERY INCLUDED)		280 g (9.9 Oz)

CONFORMITY

Complies with the applicable magnetic field standards concerning human exposure and pacemaker safety

Conforms to the applicable standards for electrical safety and EMC

NRTL certified

SPECIFICATIONS

TEMPERATURE	- 40°C to + 60°C (- 40 to +140°F)
CHARGER TYPE	Standard Micro-USB 5VDC 1-2 A
CHARGING TIME	3 hrs
BATTERY SAVER	1 hrs non use atm - shutdown
POWER SUPPLY	2 AA batteries (rechargeable NiMH, disposable alkaline or lithium battery).
BATTERY LIFE	Up to 500h, typical 300h with rechargeable NiMH battery. 2500mAh battery capacity.
BATTERY LIFE (EXTRA)	Up to lifetime based on standby current (no alarm), typical based on 10% audible alarm / 90% standby.

ACCESSORIES AND OPTIONS

Plug in Universal micro-USB charger

Belt holder

Carrying case (soft bag)

Rapiscan®
systems
An OSI Systems Company

Rapiscan® Systems is ISO 9001:2015 Certified

With continual development of our products Rapiscan® Systems reserves the right to amend specifications without notice. Product pictures are for general reference. Please note that due to US laws and regulations, not all Rapiscan® products are available for sale in all countries without restriction. Please contact your Rapiscan® Systems sales representative for more information.

DS-METOR28E-002